


double adhesive transfer tape

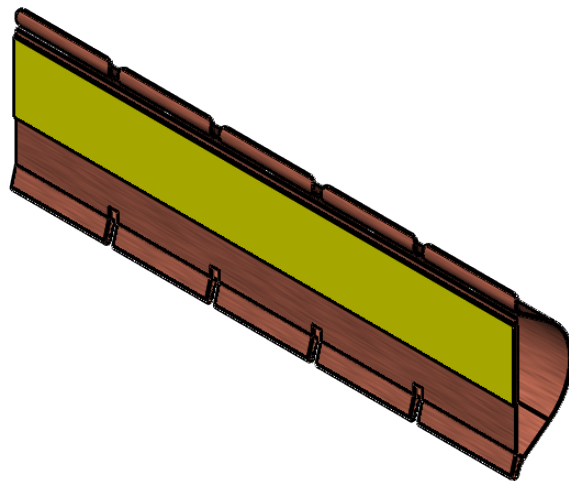

**drawing for customer information**

<b>FEUERHERDT</b> EMI Shielding Products Specialist for Contact Springs	tolerances:	length tolerance:	dimensions in mm	scale: <b>2:1</b>	revision: <b>00</b>
	X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	unmeasured contours according to 3D data	material: <b>rawmaterial: CuBe 2, 1/2H</b> <b>finalstate: CuBe 2, 1/2HT</b>	
		date:	name:	description:	
		created 07.09.20	<b>Gutmann</b>	<h1>type V12</h1>	
		checked 08.12.20	<b>Pröhl</b>		
		released			
		surface code:		drawing number:	
		bright finish -02	zink chromate/	<h1>CF.005.00.C</h1>	
		gold -03	clear -15		
		silver -04	bright tin -17 bright nickel -19		
rev.	description	date	name	thickness: t= 0,09	replacement drawing:

Stripes can be cut off after each finger on request.  
 Calculation of length in mm:  
 strip length = number of fingers x 1 pitch - 1 slot

