




double adhesive transfer tape

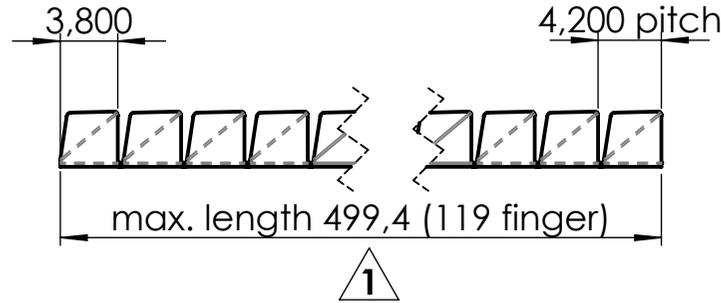

drawing for customer information

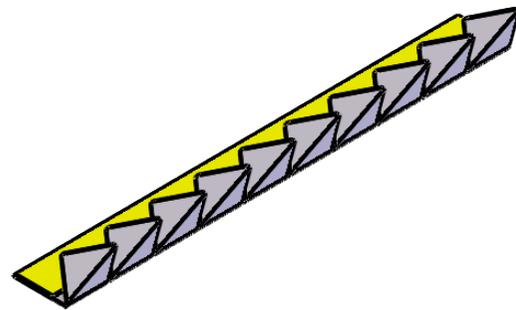

FEUERHERDT
EMI Shielding Products
Specialist for Contact Springs

tolerances:	length tolerance:
X,X ± 0,5	100-300 ± 0,5
X,XX ± 0,2	300-400 ± 0,8
X,XXX ± 0,1	400-500 ± 1
	> 500 ± 1,5

dimensions in mm
unmeasured contours according to 3D data

scale: **2:1** revision: **00**

material: **stainless steel 1.4310**
X10CrNi18-8 F1100-1300

date:	name:
created 20.06.22	Pröhl
checked 20.06.22	Akrim
released	

description:
type X1

surface code:

bright finish -02	zink chromate/
gold -03	clear -15
silver -04	bright tin -17
	bright nickel -19

drawing number:
TC.003.00.E

sheet: 1

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

rev.	description	date	name	thickness: t= 0,08
------	-------------	------	------	--------------------

replacement drawing: