

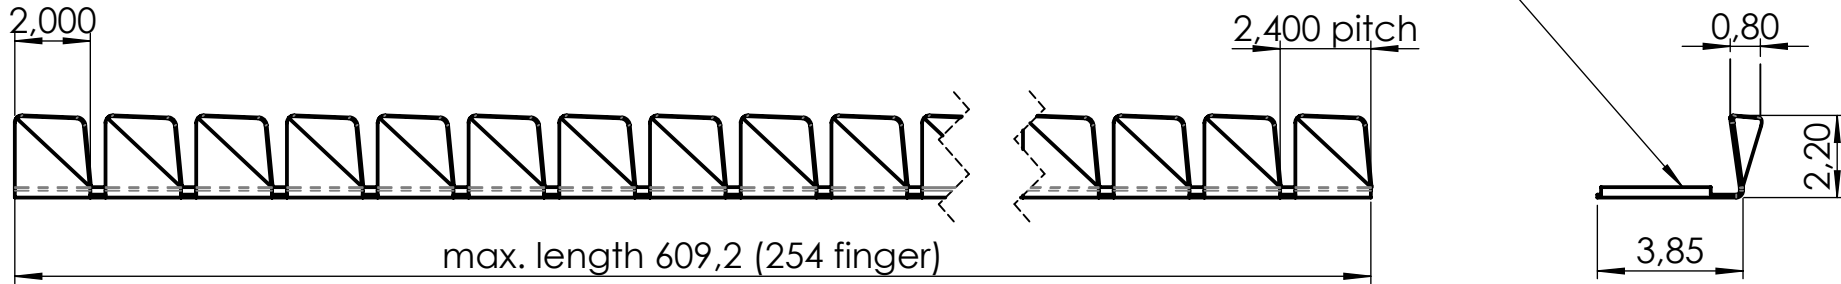


double adhesive transfer tape

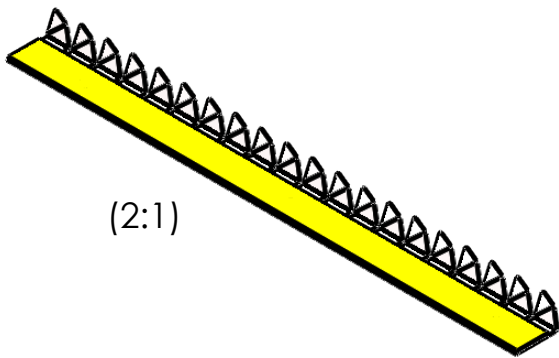

max. length 609,2 (254 finger)

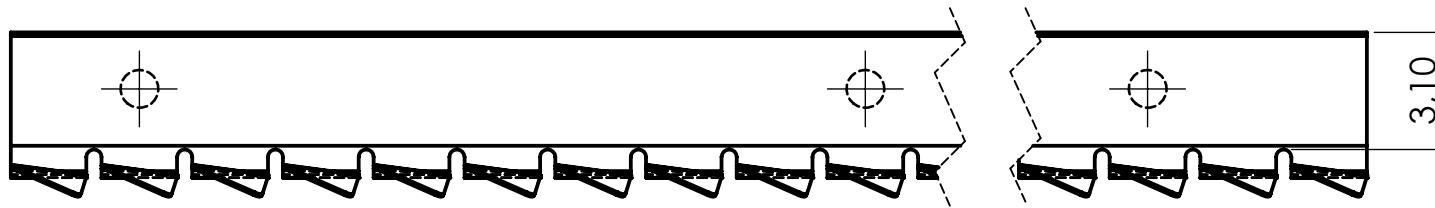

(2:1)

drawing for customer information

<b>FEUERHERDT</b> EMI Shielding Products Specialist for Contact Springs		tolerances:	length tolerance:	dimensions in mm	scale: <b>5:1</b>	revision: <b>00</b>
		X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	unmeasured contours according to 3D data	material: <b>stainless steel 1.4310</b> <b>X10CrNi18-8 F1100-1300</b>	
			date: 16.11.20	name: <b>Pröhl</b>	description:  <b>type X2M</b>	
			created			
			checked		drawing number: <b>TC.012.00.E</b>	
			released			
			surface code:		sheet: 1	
			bright finish -02 gold -03 silver -04	zink chromate/clear -15 bright tin -17 bright nickel -19		
rev.	description	date	name	thickness: t= <b>0,08</b>	replacement drawing:	

Stripes can be cut off after each finger on request.  
 Calculation of length in mm:  
 strip length = number of fingers x 1 pitch - 1 slot

