
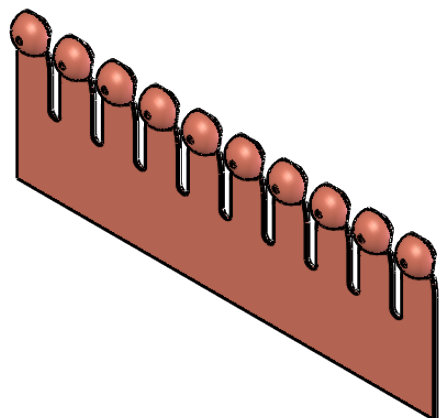



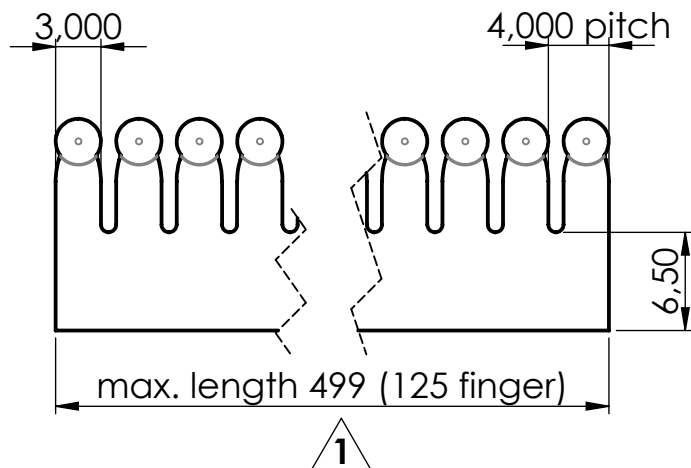

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5		dimensions in mm unmeasured contours according to 3D data	scale: 2:1	revision: 00
		X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1			material:	rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT
				date:	name:	description:
				created 18.05.20	Gutmann	type A
				checked 03.06.20	Pröhl	
				released		
				surface code:		
				bright finish -02 gold -03 silver -04	zink chromate/clear -15 bright tin -17 bright nickel -19	drawing number:
				thickness: t= 0,2		CS.001.00.C
rev.	description	date	name	replacement drawing:		A4 sheet: 1

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot