Copying of this document,and giving it to others and the use or communication of the contents thereof,are forbidden without express authority.All rights reserved.

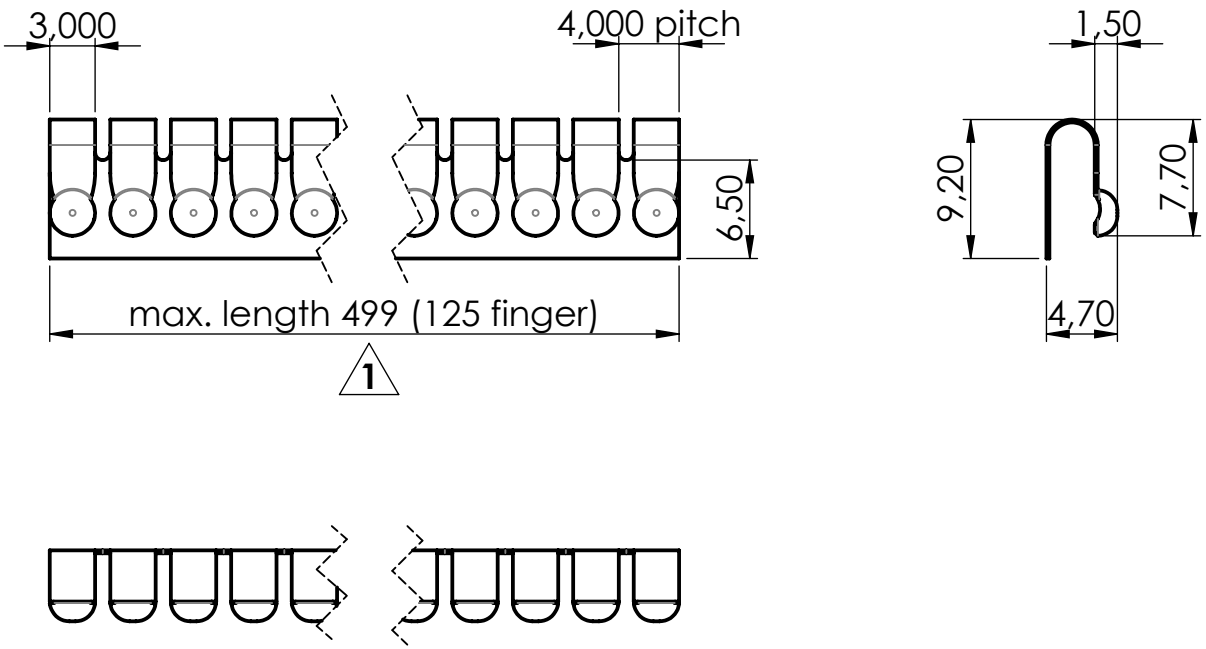

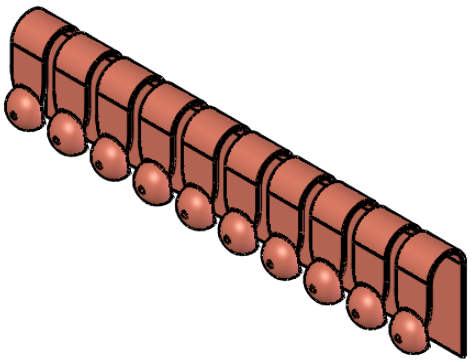

1 **Stripes can be cut off after each finger on request.**
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

drawing for customer information

FEUERHERDT
EMI Shielding Products
Specialist for Contact Springs

tolerances:	length tolerance:	dimensions in mm
X,X ± 0,5	100-300 ± 0,5	
X,XX ± 0,2	300-400 ± 0,8	unmeasured contours according to 3D data
X,XXX ± 0,1	400-500 ± 1	
	> 500 ± 1,5	

scale: **2:1** revision: **00**

material: **rawmaterial: CuBe 2, 1/2H**
finalstate: CuBe 2, 1/2HT

	date:	name:
created	03.06.20	**Gutmann**
checked	04.06.20	**Pröhl**
released		

description:

type G

surface code:

bright finish	**-02**	**zink chromate/ clear**	**-15**
gold	**-03**	**bright tin**	**-17**
silver	**-04**	**bright nickel**	**-19**

drawing number: **CS.007.00.C**

A4

sheet: 1

rev.	description	date	name

thickness: t= **0,2**

replacementdrawing: