
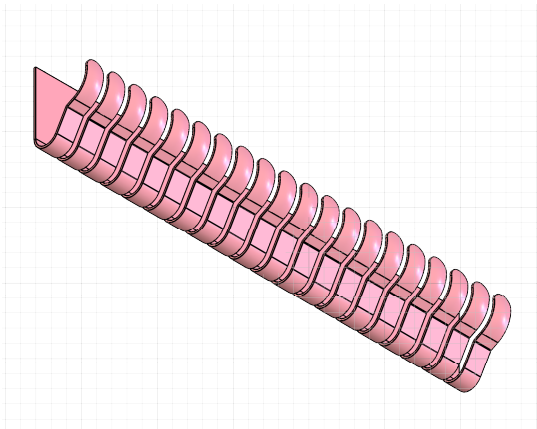
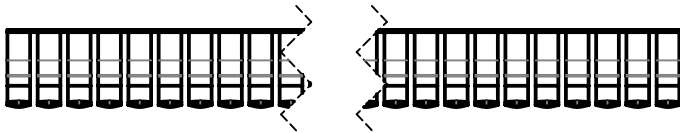
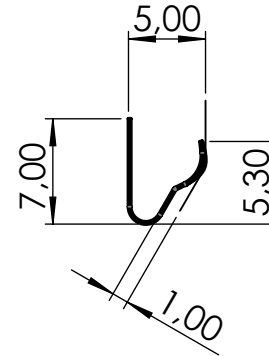


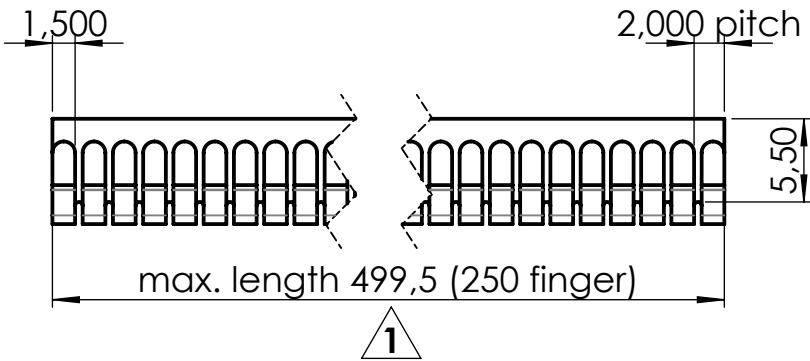

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1		length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5		dimensions in mm		scale: 2:1		revision: 00
						unmeasured contours according to 3D data		material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT		
						date: 16.06.20		description: type Q		
						checked 22.06.20				Gutmann
						released				Pröhl
						surface code:		drawing number: CS.017.00.C		A4
						bright finish -02				zink chromate/
						gold -03				clear -15
						silver -04				bright tin -17
						bright nickel -19				sheet: 1
rev.	description	date	name	thickness: t=0,15			replacementdrawing:			

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

1