
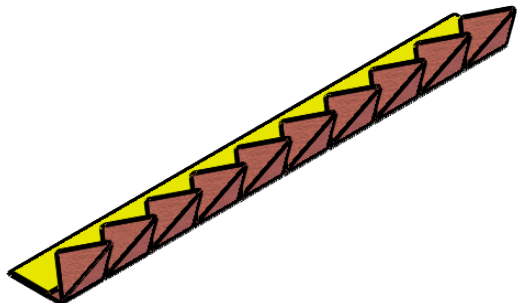
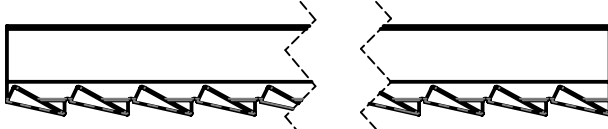



double adhesive transfer tape

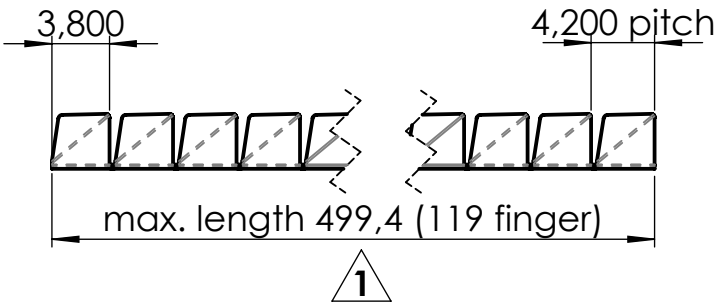

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1		length tolerance:		dimensions in mm		scale: 2:1		revision: 00
				100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5		unmeasured contours according to 3D data		material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT		
					date:	name:		description: type X1		
				created	09.06.20	Gutmann				
				checked	15.06.20	Pröhl				
				released						
				surface code:						
				bright finish -02		zink chromate/		drawing number: TC.003.00.C		
				gold -03		clear -15				
				silver -04		bright tin -17				
						bright nickel -19		sheet: 1		
rev.	description		date	name	thickness: t= 0,08					

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

1