
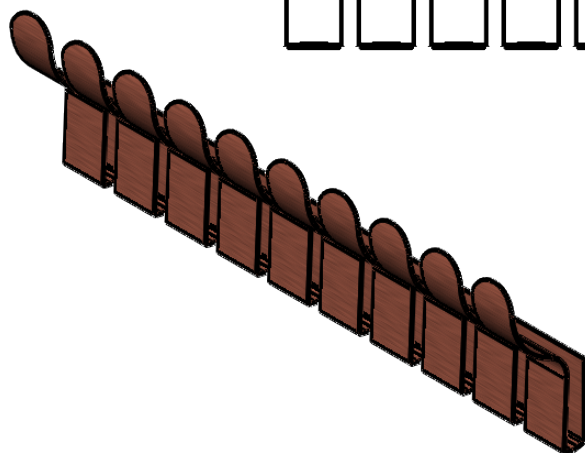
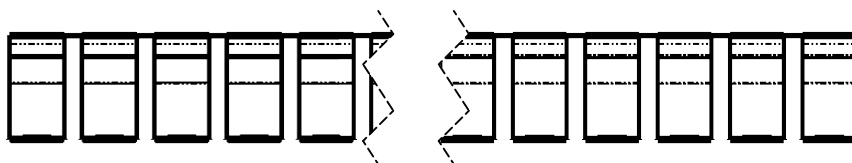
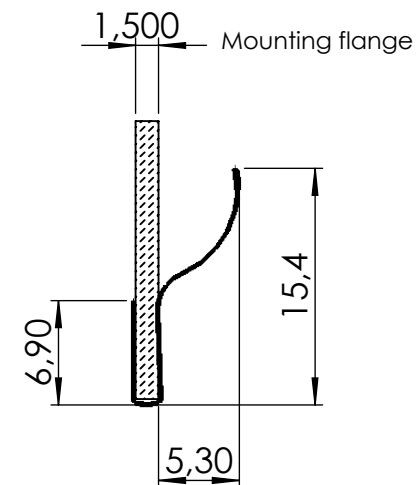


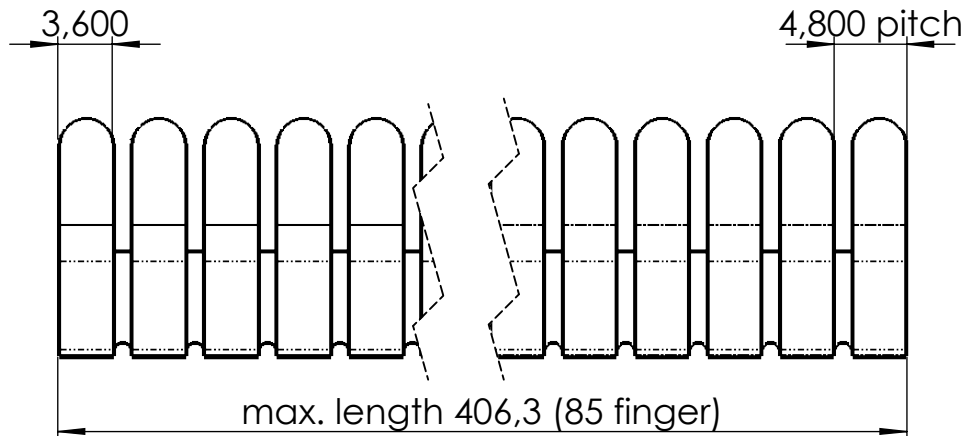

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs			tolerances:			length tolerance:		dimensions in mm		scale: 2:1				revision: 00						
			X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1			100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5			unmeasured contours according to 3D data		material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT									
						date:			name:			description: type CL14								
						created 01.09.20			Gutmann											
						checked 01.10.20			Pröhl											
						released														
						surface code:			drawing number: CO.027.15.C											
						bright finish -02												zink chromate/		
						gold -03												clear -15		
						silver -04												bright tin -17		
									bright nickel -19			sheet: 1								
rev.			description			date			name									thickness: t= 0,1		

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

1