
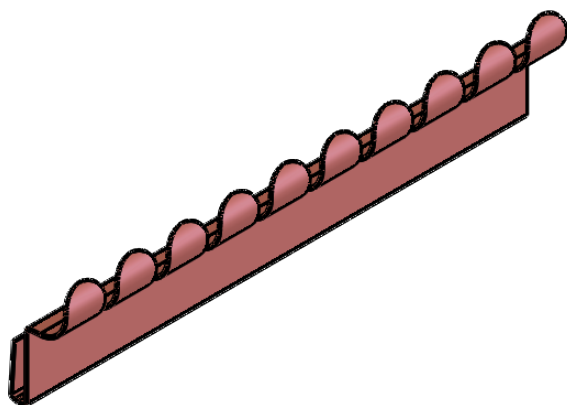
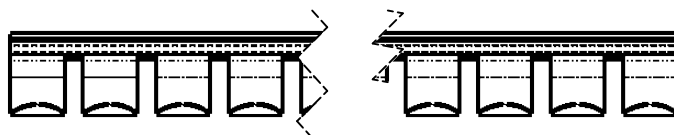
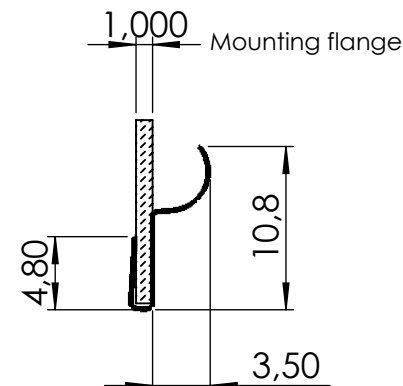


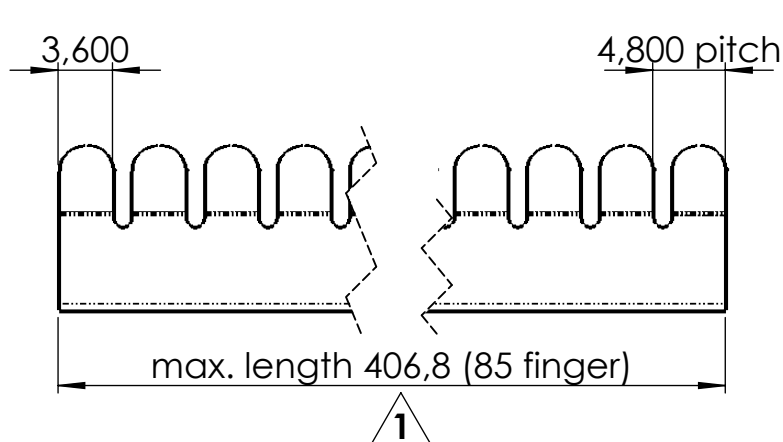

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances:		length tolerance:	dimensions in mm	scale: 2:1		revision: 00
		X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	unmeasured contours according to 3D data	material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT			
				date:	name:	description: type CL3-1		
			created	23.07.20	Gutmann			
			checked	17.08.20	Pröhl			
			released					
				surface code:		drawing number: CO.008.10.C		
			bright finish -02	zink chromate/				
			gold -03	clear -15				
			silver -04	bright tin -17 bright nickel -19				
rev.	description	date	name	thickness: t= 0,127		replacementdrawing:		
						A4		sheet: 1

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

sheet: 1