

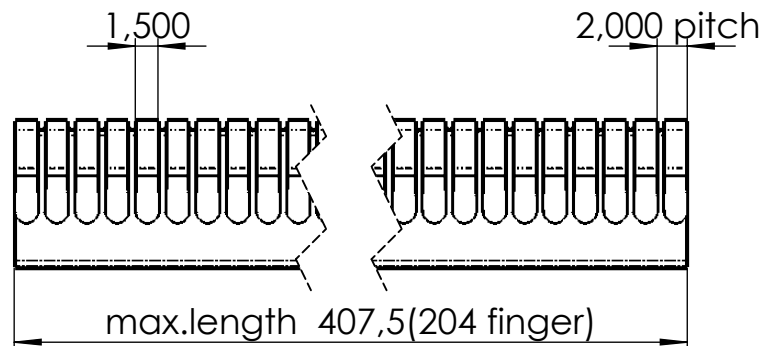
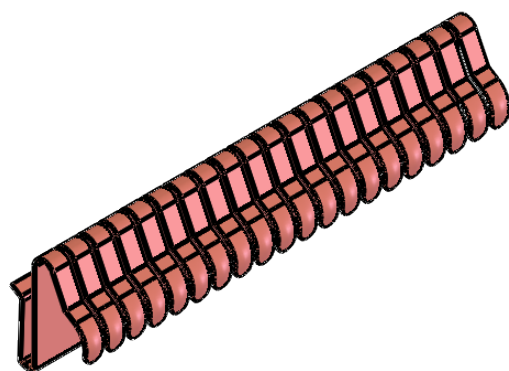


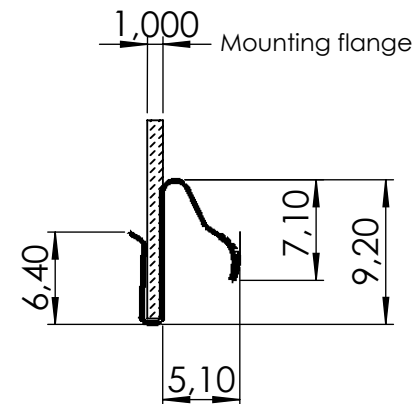

1

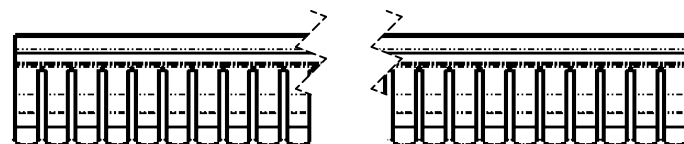

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances:		length tolerance:		dimensions in mm		scale:	2:1		revision:	00
		X,X ± 0,5	300-400 ± 0,8	unmeasured contours according to 3D data		material:		rawmaterial: CuBe 2, 1/2H				
		X,XX ± 0,2	400-500 ± 1					finalstate: CuBe 2, 1/2HT				
		X,XXX ± 0,1	> 500 ± 1,5									
				date:		name:	description:					
			created	11.09.20		Gutmann	type CL38					
			checked	13.11.20		Pröhl						
			released									
					surface code:		drawing number:					
					bright finish -02	zink chromate/						
					gold -03	clear -15						
					silver -04	bright tin -17						
						bright nickel -19	CO.042.10.C					
rev.	description	date	name	thickness: t=0,15			replacementdrawing:					
							A4					
							sheet: 1					

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

1