
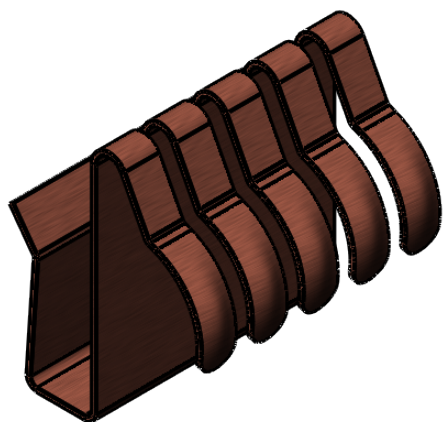
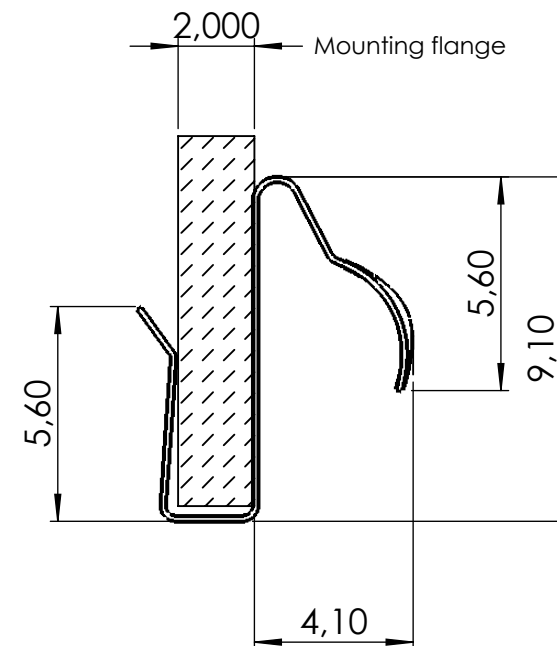


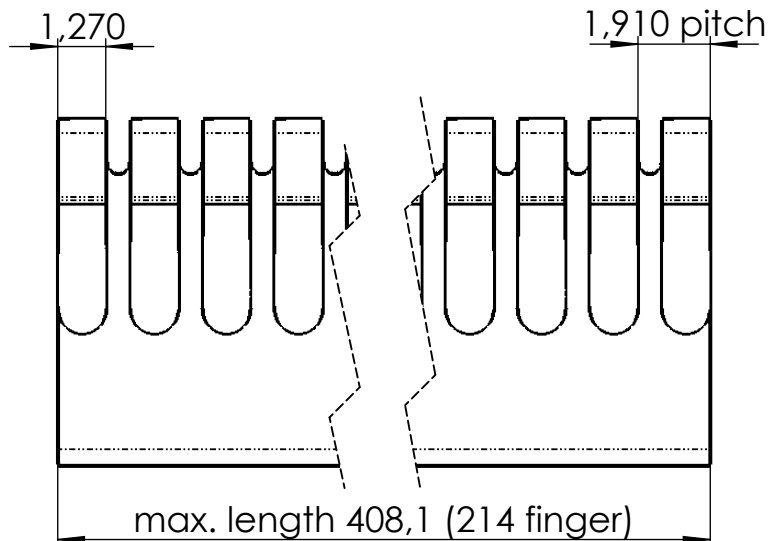

drawing for customer information

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5		dimensions in mm unmeasured contours according to 3D data	scale: 5:1	revision: 00
		X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1			material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT	
				date: 14.09.20 checked 20.11.20 released	name: Gutmann Pröhl	description: type CL44
				surface code: bright finish -02 gold -03 silver -04	zink chromate/ clear -15 bright tin -17 bright nickel -19	drawing number: CO.043.20.C
rev.	description	date	name	thickness: t= 0,127	replacement drawing:	

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

1

A4

sheet: 1