


1

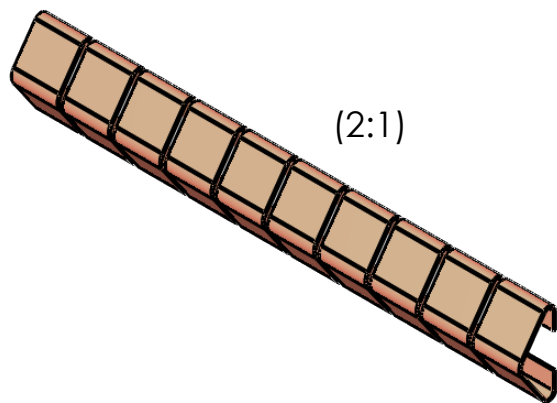

drawing for customer information

1

Stripes can be cut off after each finger on request.  
 Calculation of length in mm:  
 strip length = number of fingers x 1 pitch - 1 slot

|   |  |  |   |  |  |   |
|---|--|--|---|--|--|---|
| <b>FEUERHERDT</b><br>EMI Shielding Products<br>Specialist for Contact Springs |  | tolerances:<br>X,X ± 0,5<br>X,XX ± 0,2<br>X,XXX ± 0,1        | length tolerance:<br>100-300 ± 0,5<br>300-400 ± 0,8<br>400-500 ± 1<br>> 500 ± 1,5 | dimensions in mm<br>unmeasured contours according to 3D data | scale: <b>5:1</b>  | revision: <b>00</b>                     |
|   |  | date: 23.06.20<br>created<br>checked 29.06.20<br>released    |   | name: <b>Gutmann</b><br><b>Pröhl</b>                         | material: <b>rawmaterial: CuBe 2, 1/2H</b><br><b>finalstate: CuBe 2, 1/2HT</b> |   |
|   |  | surface code:<br>bright finish -02<br>gold -03<br>silver -04 |   | description:<br><h1>type GK2</h1>                            |  | drawing number:<br><h1>SM.002.00.C</h1> |
| rev. description date name thickness: t=0,09                                  |  |  |   | replacement drawing:   |  | sheet: 1                                |