


double adhesive transfer tape

**drawing for customer information**

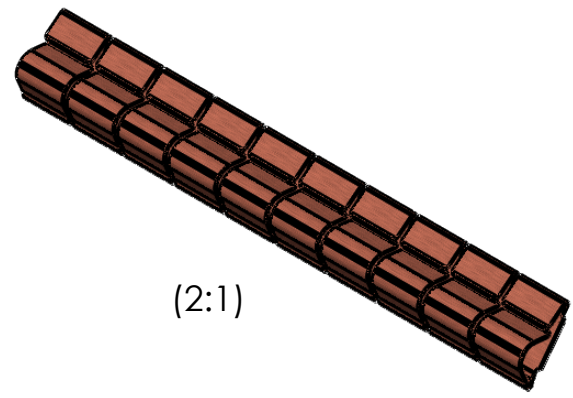

Stripes can be cut off after each finger on request.  
 Calculation of length in mm:  
 strip length = number of fingers x 1 pitch - 1 slot

<b>FEUERHERDT</b> EMI Shielding Products Specialist for Contact Springs		tolerances: X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	dimensions in mm unmeasured contours according to 3D data	scale: <b>5:1</b>	revision: <b>00</b>
				date: 16.06.21 name: <b>Pröhl</b>	material: <b>rawmaterial: CuBe 2, 1/2H</b> <b>finalstate: CuBe 2, 1/2HT</b>	
				checked: 16.06.21 name: <b>Akrim</b>	description: <h1>type V19</h1>	
				released:	drawing number: <h1>SF.001.00.C</h1>	
				surface code: bright finish -02 gold -03 silver -04	sheet: <b>A4</b> sheet: 1	
rev.	description	date	name	thickness: t= 0,06	replacement drawing:	

1