


double adhesive transfer tape

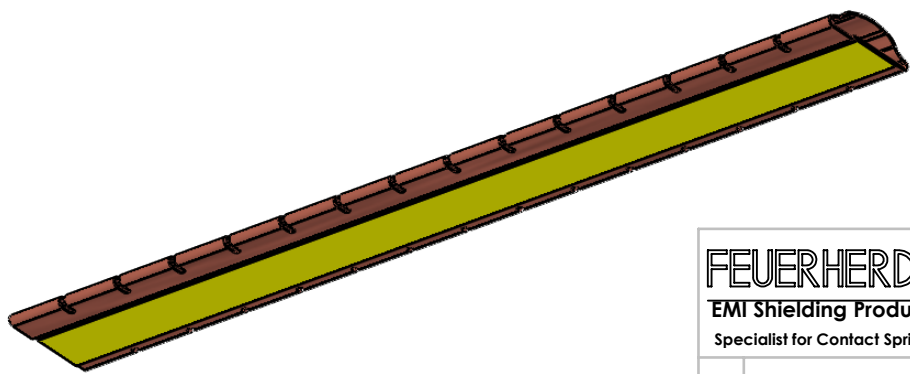

drawing for customer information

1

Stripes can be cut off after each finger on request.
 Calculation of length in mm:
 strip length = number of fingers x 1 pitch - 1 slot

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	dimensions in mm unmeasured contours according to 3D data	scale: 2:1	revision: 00
		date: 24.02.21 created: 24.02.21 checked: 24.02.21 released:		name: Pröhl Akrim	material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT	
		surface code: bright finish -02 gold -03 silver -04		zink chromate/clear -15 bright tin -17 bright nickel -19	description: <h1>type W6</h1>	
		thickness: t= 0,09		drawing number: <h1>GS.007.00.C</h1>		sheet: 1
rev.	description	date	name	replacement drawing:		