


max. length 407 (97 finger)

1

2,000 (Mounting surface)

**drawing for customer information**

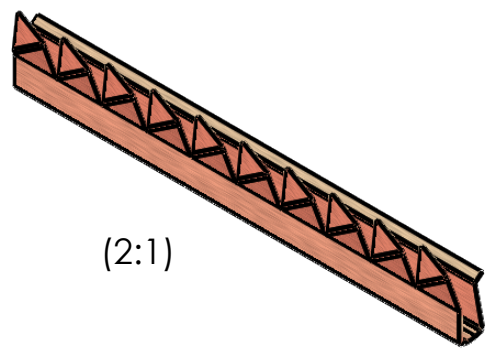

Stripes can be cut off after each finger on request.  
 Calculation of length in mm:  
 strip length = number of fingers x 1 pitch - 1 slot

1

<b>FEUERHERDT</b> EMI Shielding Products Specialist for Contact Springs		tolerances:	length tolerance:	dimensions in mm	scale: <b>5:1</b>	revision: <b>00</b>
		X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	unmeasured contours according to 3D data	material:	rawmaterial: <b>CuBe 2, 1/2H</b> finalstate: <b>CuBe 2, 1/2HT</b>
		date:	name:	description:		
		created 10.06.20	<b>Gutmann</b>	<b>type X4</b>		
		checked 16.06.20	<b>Pröhl</b>			
		released		drawing number:		
		surface code:		<b>TC.008.20.C</b>		
		bright finish -02	zink chromate/			
		gold -03	clear -15	sheet: 1		
		silver -04	bright fin -17	replacement drawing:		
			bright nickel -19			
rev.	description	date	name	thickness: t=0,08		