


drawing for customer information

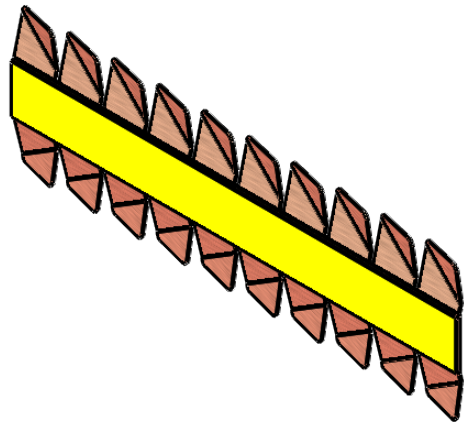

Stripes can be cut off after each finger on request.
Calculation of length in mm:
strip length = number of fingers x 1 pitch - 1 slot

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	dimensions in mm unmeasured contours according to 3D data	scale: 2:1	revision: 00
			date: 09.06.20	name: Gutmann	material: rawmaterial: CuBe 2, 1/2H finalstate: CuBe 2, 1/2HT	
			checked 30.07.20	name: Pröhl	type Y	
			released			
			surface code: bright finish -02 gold -03 silver -04		description: TC.024.00.C	
			zink chromate/ clear -15 bright tin -17 bright nickel -19		drawing number: TC.024.00.C	
rev.	description	date	name	thickness: t= 0,08	sheet: 1	

1