


double adhesive transfer tape

drawing for customer information

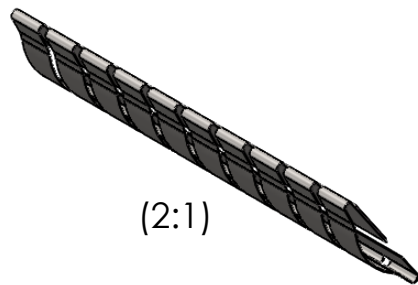

(2:1)

Strips can be cut off after each finger on request.  
 Calculation of length in mm:  
 strip length = number of fingers x 1 pitch - 1 slot



<b>FEUERHERDT</b> EMI Shielding Products Specialist for Contact Springs		tolerances:	length tolerance:	dimensions in mm	scale: <b>5:1</b>	revision: <b>01</b>
		X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	unmeasured contours according to 3D data	material: <b>stainless steel 1.4310</b> <b>X10CrNi18-8 F1100-1300</b>	
		date:	name:	description:		
		created 07.06.22	<b>Pröhl</b>	<b>type NP2</b>		
		checked 07.06.22	<b>Akrim</b>			
		released		drawing number:		
		surface code:		<b>LP.001.00.E</b>		
		bright finish -02    zink chromate/    clear    -15 gold    -03    bright tin    -17 silver    -04    bright nickel    -19				
01	Material thickness	29.08.22	Pröhl	thickness: t= 0,06	sheet: 1	
rev.	description	date	name	replacement drawing:		