



Mounting surface flange 1,5 max.

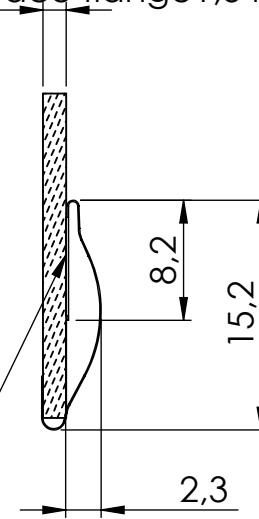

double adhesive transfer tape

drawing for customer information

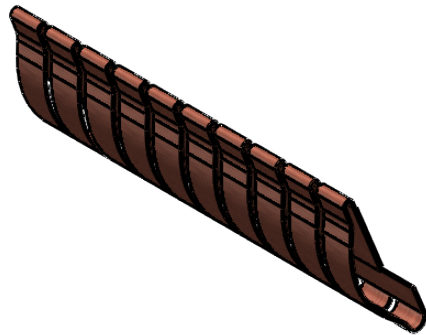

Strips can be cut off after each finger on request.
 Calculation of length in mm:
 strip length = number of fingers x 1 pitch - 1 slot

FEUERHERDT EMI Shielding Products Specialist for Contact Springs		tolerances: X,X ± 0,5 X,XX ± 0,2 X,XXX ± 0,1	length tolerance: 100-300 ± 0,5 300-400 ± 0,8 400-500 ± 1 > 500 ± 1,5	dimensions in mm unmeasured contours according to 3D data	scale: 2:1	revision: 00
					material: raw material: CuBe 2, 1/2H final state: CuBe 2, 1/2HT	
				date: created 02.07.21 checked 02.07.21 released	name: Pröhl Akrim	description: <h1>type NPH2</h1>
				surface code: bright finish -02 gold -03 silver -04	zink chromate/clear -15 bright tin -17 bright nickel -19	drawing number: <h1>LP.004.15.C</h1>
rev.	description	date	name	thickness: t= 0,09	replacement drawing: A4 sheet: 1	